

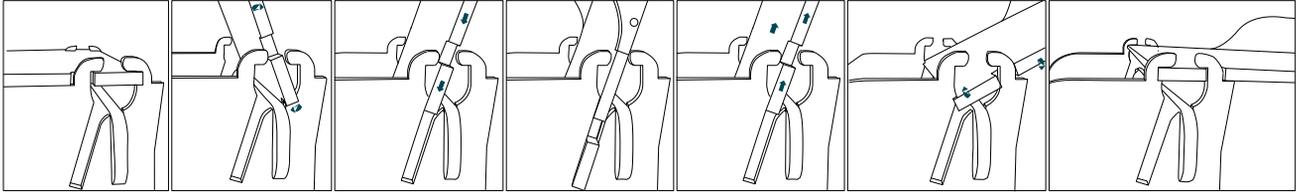
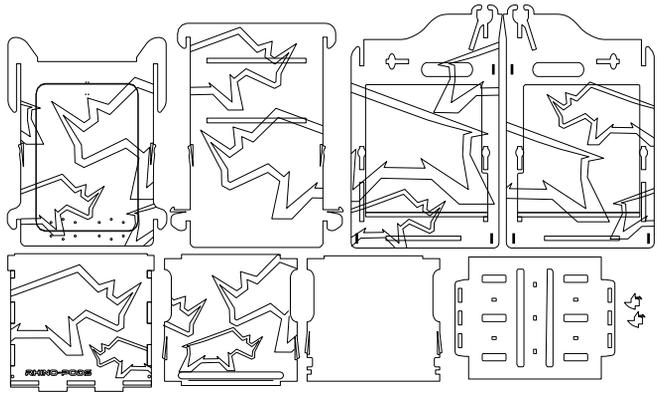



DISASSEMBLING YOUR CAMBIO POD

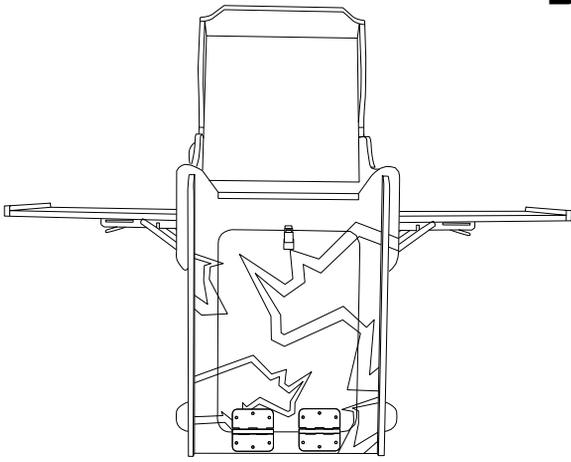


1. Taking off the lid There are three positions for the lid: closed, upright and fully backward. From the closed and backward positions, turn the lid in the slots on the top of the side panels, to the opening and lift it out. From the upright position simply lift the lid out the opening in the slots

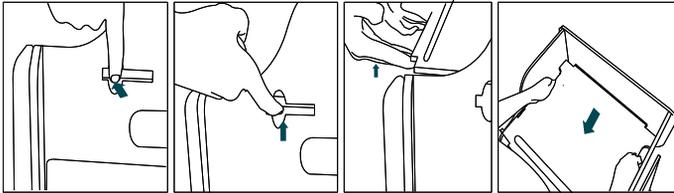


2. Releasing and taking out the top shelf (the etched one) Release the shelf catches by pushing them in through the horizontal locating slots on both sides of the side panels (located near the top front) and lift the shelf until it clears the locating slots on both sides. Then, using the handholds lift the shelf out, sliding it out the back slot at the same time.

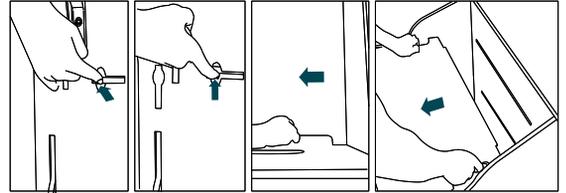


3. Releasing and taking out the middle shelf (non-etched one) Release the shelf catches by pushing them in through the horizontal locating slots on both sides of the side panels (under the side tables near the front) and lift the shelf until it clears the horizontal locating slots on both sides. Then, using the handholds lift the shelf out, sliding it out the back slot, and off the shelf clips (if used) at the same time.

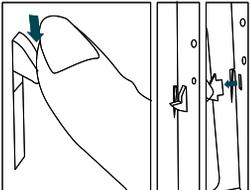


4. Releasing and taking out the middle shelf clips (required if putting heavier items on the middle shelf) If used, to release the shelf clips, find the holes for the shelf clips on the outside of the two side panels and push down the catch of the side clip and push through the hole toward the inside of the pod to release, then pull them free from the inside.

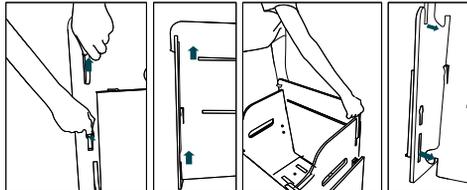

5. Releasing and Removing the back panel To release the catches on the side of the back panel, push in the panel catch through the vertical locating hole on the side panel you want to release first (you will see the vertical locating hole toward the front middle on each side panel) and at the same time lift the front panel up until the panel catch clears the locating hole. Once you have done this on one side, repeat on the other side while keeping the back panel lifted. Then take the back panel out of the slots in the side panel on one side, then do the same on the other.

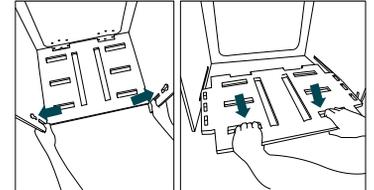

6. Taking out the Bottom shelf Pull apart the two side panels and pull the bottom shelf towards you, out of the lower slots of the two side panels.

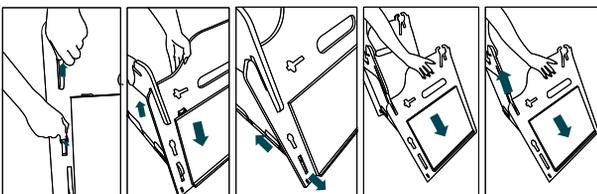

7. Releasing and taking apart the side panels from the front panel (one at a time) To release the catch on the side of the front panel, on the side you want to release first, push in the panel catch through the vertical locating hole on the side panel you want to release first (you will see the vertical locating hole toward the front middle on each side panel) and at the same time lift the front panel up until the panel catch clears the locating hole. Then take the side panel out and away from the front panel, and put it to one side. Once you have done this on one side, repeat on the other side with the other side panel.

Now your pod is ready to be stored away, to reassemble your pod follow the instructions on the other side.

Don't be afraid to be rough with your pod, they're built for it!

Enjoy and feel free to leave some feedback or email us info@rhino-pods.com

